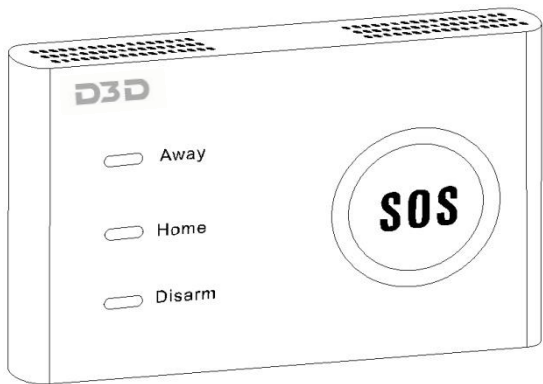# D3D Wi-Fi/GSM Smart Alarm System Quick View

Panel View

Front Panel View

Speaker
Away Arm
Home Arm
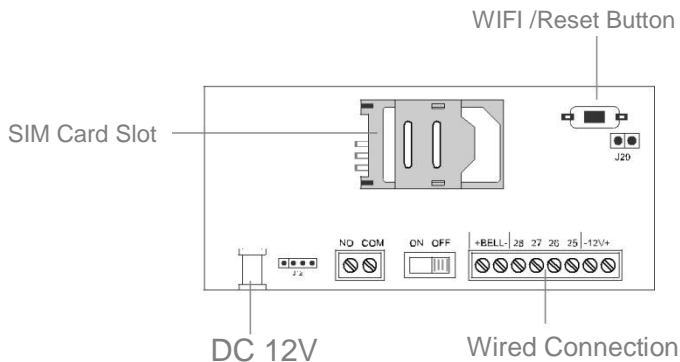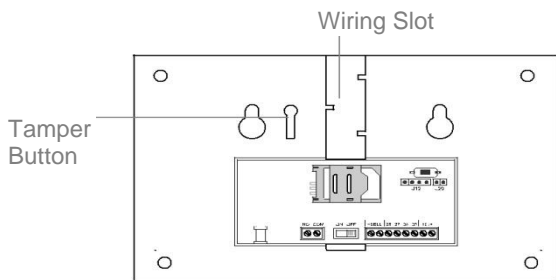Disarm
S O S
LED Indicator
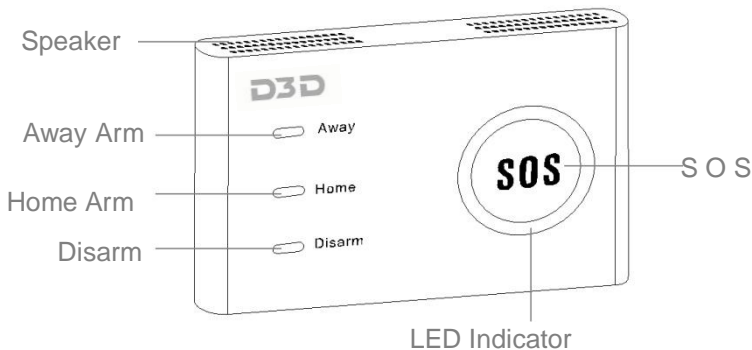
LED Indicator

- When LED indicates BLUE, the system is in normal working status

- When LED indicates WHITE, it means WIFI offline, no WIFI network

- When LED indicates RED, the system is in alarming status

Check GSM signal: Press SOS button on the panel once, if LED indicates blue and flash 5 times and then long light, it means GSM is not working (No SIM card inserted, bad signal or SIM card disconnected)

*To activate SOS, long press SOS button for 10 seconds

Wiring Slot

Tamper
Button

WIFI /Reset Button

SIM Card Slot

J20

NO COM   ON OFF   +BELL- 28 27 26 25 -12V+

DC 12V

Wired Connection

- Press WIFI/RESET button for 3s, the alarm panel will enter into WIFI connecting mode

- Press WIFI/RESET button for 6s, delete existing WiFi connection.

- Press WIFI/RESET button for 9s, system will factory reset.

MAKING HOME SAFE & SECURE...